

## 4FP...C FORCELLE YOKES

VERSIONE STANDARD  
• MATERIALE 9 SMnPb28, ZINCATO

STANDARD VERSION  
• MATERIAL 9 SMnPb28, GALVANIZED

VERSIONE INOX CODE: 4FP...C-N

• DIN 71752 - ISO 8140 (CETOP)  
• MATERIALE INOX AISI 303

STAINLESS STEEL VERSION CODE:

4FP...C-N  
• DIN 71752 - ISO 8140  
(CETOP)  
• MATERIAL STAINLESS  
STEEL AISI 303




| SIGLA<br>CODE | CILINDRO<br>CYLINDER<br>Ø | Q.tà<br>Q.ty<br>** | d FILETTO<br>d THREAD | a  | VALORI TOLLERANZA<br>TOLERANCE VALUES |        | b  | d <sub>1</sub> | VALORI TOLLERANZA<br>TOLERANCE VALUES |   | d <sub>2</sub> | e    | f   | L   | L <sub>1</sub> | n  | r   | FATTORI<br>DI CARICO<br>LOAD FACTOR<br>Statico C <sub>0</sub><br>Static C <sub>0</sub> | PESO<br>WEIGHT |
|---------------|---------------------------|--------------------|-----------------------|----|---------------------------------------|--------|----|----------------|---------------------------------------|---|----------------|------|-----|-----|----------------|----|-----|----------------------------------------------------------------------------------------|----------------|
|               |                           |                    |                       |    | a (B12)                               |        |    |                | d <sub>1</sub> (H9)                   |   |                |      |     |     |                |    |     | KN                                                                                     | kg.            |
| 4FP 10x20C    | 25/32                     | 10                 | 10x1,25               | 10 | +0,150                                | +0,300 | 20 | 10             | +0,043                                | 0 | 18             | 15   | 0,5 | 52  | 40             | 20 | 0,5 | 2,0                                                                                    | 0,070          |
| 4FP 12x24C    | 40                        | 5                  | 12x1,25               | 12 | +0,150                                | +0,330 | 24 | 12             | +0,043                                | 0 | 20             | 18   | 0,5 | 62  | 48             | 24 | 0,5 | 2,88                                                                                   | 0,120          |
| 4FP 16x32C    | 50/63                     | 2                  | 16x1,5                | 16 | +0,150                                | +0,330 | 32 | 16             | +0,043                                | 0 | 26             | 24   | 1   | 83  | 64             | 32 | 1   | 5,12                                                                                   | 0,250          |
| 4FP 20x40C    | 80/100                    | 1                  | 20x1,5                | 20 | +0,160                                | +0,370 | 40 | 20             | +0,052                                | 0 | 34             | 30   | 1   | 105 | 80             | 40 | 1   | 8,0                                                                                    | 0,550          |
| 4FP 25x50C*   | -                         | 1                  | 24x2                  | 25 | +0,160                                | +0,370 | 50 | 25             | +0,052                                | 0 | 42             | 36   | 1   | 132 | 100            | 50 | 1   | 12,5                                                                                   | 1,100          |
| 4FP 30x54C*   | 125                       | 1                  | 27x2                  | 30 | +0,160                                | +0,370 | 55 | 30             | +0,062                                | 0 | 48             | 38   | 1   | 148 | 110            | 54 | 1   | 12,5                                                                                   | 1,460          |
| 4FP 35x72C*   | 160/200                   | 1                  | 36x2                  | 35 | +0,170                                | +0,420 | 70 | 35             | +0,062                                | 0 | 60             | 40   | 1   | 188 | 144            | 72 | 1   | 24,5                                                                                   | 3,270          |
| 4FP 42x84C*   | 250                       | -                  | 42x2                  | 42 | +0,180                                | +0,430 | 85 | 42             | +0,062                                | 0 | 70             | 63,5 | 1   | 232 | 168            | 84 | 5   | 35,5                                                                                   | 5,3            |
| 4FP 50x96C*   | 300                       | -                  | 48x2                  | 50 | +0,180                                | +0,430 | 95 | 50             | +0,062                                | 0 | 82             | 73   | 1   | 265 | 192            | 96 | 5   | 41                                                                                     | 7,9            |

(\*) DIMENSIONI NON A NORMA (\*) DIMENSIONS DO NOT FOLLOW THE STANDARDS

(\*\*) Q.tà minima e/o multipli per scatola. Forcelle e clips sono fornite insieme

(\*\*) Minimum q.ty and/or multiples for box. Yokes and lockable pins are supplied together

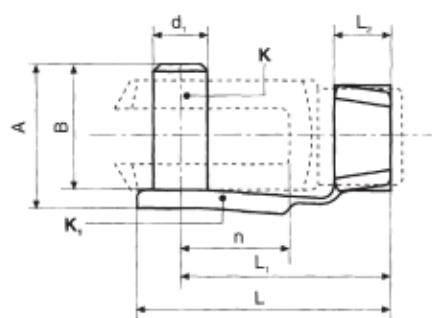

## CF CLIPS PER FORCELLE LOCKABLE PINS



| SIGLA/CODE<br>* | d <sub>1</sub> | n  | A  | B  | L  | L <sub>1</sub> | L <sub>2</sub> | PESO / WEIGHT<br>kg. |
|-----------------|----------------|----|----|----|----|----------------|----------------|----------------------|
| CF 10x20        | 10             | 20 | 26 | 23 | 46 | 39             | 10             | 0,019                |
| CF 12x24        | 12             | 24 | 32 | 28 | 55 | 47             | 12             | 0,032                |
| CF 14x28        | 14             | 28 | 35 | 31 | 62 | 52             | 14             | 0,047                |
| CF 16x32        | 16             | 32 | 40 | 36 | 72 | 62             | 14             | 0,067                |
| CF 20x40        | 20             | 40 | 48 | 44 | 88 | 72             | 16             | 0,130                |

(\*) ZINCATE

(\*) GALVANIZED