




F

• FORCELLA+PERNO • YOKES+PIN

- ISO 8133
- MATERIALE ACCIAIO ST 52.3
- ISO 8133
- MATERIAL: ST 52.3 STEEL

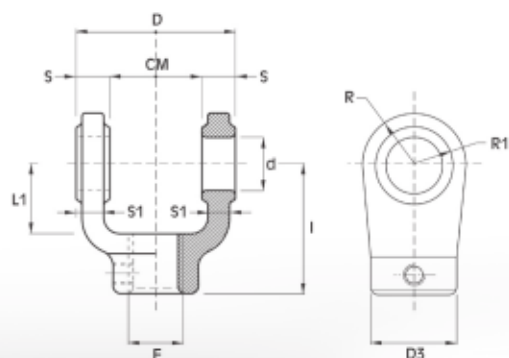


SIGLA CODE	CM	d	I	D	D3	F	L1	R	S	R1	S1	CARICO STATICO STATIC LOAD KN	GRANO GRAIN	PESO WEIGHT kg.
F 2310	12	10	32	24	19	M10x1,25	13	12	6	10	5	8	M5x5	0,10
F 2312	16	12	36	32	21	M12x1,25	19	17	8	15	7	12,5	M5x5	0,18
F 2314	20	14	38	40	21	M14x1,5	19	17	10	11	8	20	M5x5	0,23
F 2316	30	20	54	60	32	M16x1,5	32	29	15	15	13	32	M6x6	0,90
F 2320	30	20	60	60	32	M20x1,5	32	29	15	15	13	50	M6x6	0,91
F 2327	40	28	75	80	40	M27x2	39	34	20	20	17	80	M6x6	1,92
F 2333	50	36	99	100	56	M33x2	54	50	25	28	22	125	M8x8	4,92
F 2342	60	45	113	120	56	M42x2	57	53	30	33	27	200	M8x8	6,53
F 2348	70	56	126	140	75	M48x2	63	59	35	40	31	320	M8x8	10,11
F 2364	80	70	168	160	95	M64x3	83	78	40	48	37	500	M12x12	19,20
F 2380	80	70	168	160	95	M80x3	83	78	40	48	37	500	M12x12	18,42

4F

• FORCELLA • YOKES

- ISO 8133
- MATERIALE ACCIAIO ST 52.3
- ISO 8133
- MATERIAL: ST 52.3 STEEL

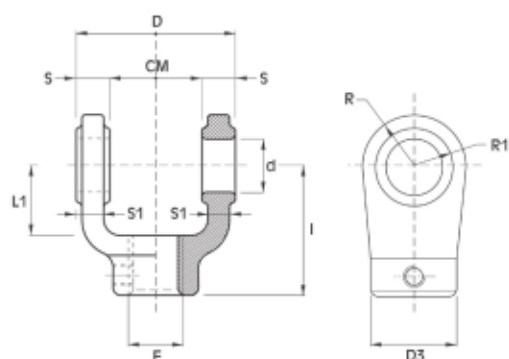

SIGLA CODE	CM	d	I	D	D3	F	L1	R	S	R1	S1	CARICO STATICO STATIC LOAD KN	GRANO GRAIN	PESO WEIGHT kg.
4F 2310	12	10	32	24	19	M10x1,25	13	12	6	10	5	8	M5x5	0,10
4F 2312	16	12	36	32	21	M12x1,25	19	17	8	15	7	12,5	M5x5	0,18
4F 2314	20	14	38	40	21	M14x1,5	19	17	10	11	8	20	M5x5	0,23
4F 2316	30	20	54	60	32	M16x1,5	32	29	15	15	13	32	M6x6	0,90
4F 2320	30	20	60	60	32	M20x1,5	32	29	15	15	13	50	M6x6	0,91
4F 2327	40	28	75	80	40	M27x2	39	34	20	20	17	80	M6x6	1,92
4F 2333	50	36	99	100	56	M33x2	54	50	25	28	22	125	M8x8	4,92
4F 2342	60	45	113	120	56	M42x2	57	53	30	33	27	200	M8x8	6,53
4F 2348	70	56	126	140	75	M48x2	63	59	35	40	31	320	M8x8	10,11
4F 2364	80	70	168	160	95	M64x3	83	78	40	48	37	500	M12x12	19,20
4F 2380	80	70	168	160	95	M80x3	83	78	40	48	37	500	M12x12	18,42