


PF

• PERNO PER FORCELLA • PIN FOR YOKES

- ISO 8133
- MATERIALE ACCIAIO C40
- ISO 8133
- MATERIAL: C40



SIGLA CODE	d	L	d1	I	A	TS	USATO PER FORCELLA USED FOR YOKE	PESO WEIGHT kg.
PF 2910	10	34	9,6	29	1,4	1,1	F 2310	0,02
PF 2911	12	43	11,5	37	1,9	1,1	F 2312	0,04
PF 2912	14	51	13,4	45	1,9	1,1	F 2314	0,06
PF 2913	20	73	19	66	2,2	1,3	F 2316	0,18
PF 2914	20	73	19	66	2,2	1,3	F 2320	0,18
PF 2915	28	95	26,6	87	2,4	1,6	F 2327	0,45
PF 2916	36	117	34	107	3,15	1,85	F 2333	0,93
PF 2917	45	139	42,5	129	3,15	1,5	F 2342	1,67
PF 2918	56	161	53	149	3,80	2,17	F 2348	2,98
PF 2919	70	181	67	169	3,35	2,65	F 2364	5,43
PF 2920	70	181	67	169	3,35	2,65	F 2380	5,43

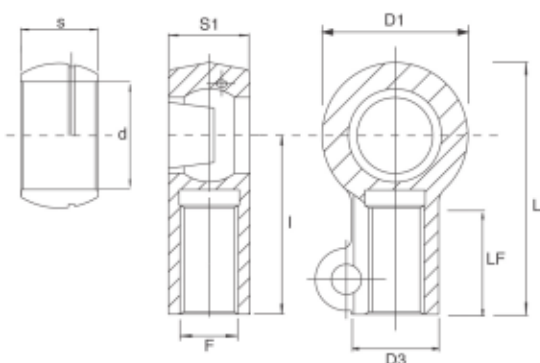

TXM

TERMINALI A SNODO PER CARRELLI ELEVATORI con ROTULA SMONTABILE BALL JOINT END FOR FORK LIFT with DISMANTLED BEARING

- RILUBRIFICABILI
- ACCOPPIAMENTO: ACCIAIO SU ACCIAIO
- TERMINALE IN ACCIAIO C 45
- WITH GREASE NIPPLE
- COUPLING: STEEL/STEEL
- BALL JOINT MADE IN FORGED STEEL C 45



SIGLA CODE *	d	I	LF	D1	S	D3	S1	L	F	FATTORI DI CARICO LOAD FACTOR		VITI - SCREWS DIN 931	PESO WEIGHT
										Statico C0 Static C0	Dinamico C Dynamic C		kg.
										KN			
TXM 25	25	92	64	75	25	45	42	129	M27x2	290	120	M14x50	1,590
TXM 30	30	92	64	75	25	45	42	129	M30x2	290	120	M14x50	1,510
TXM 35	35	92	64	75	25	45	42	129	M30x2	290	120	M14x50	1,440

ACCOPPIAMENTO SUPERFICI SNODO • JOINT SURFACE COUPLING: ACCIAIO / ACCIAIO - STEEL / STEEL