

TE-TE

DESCRIPTION

Complete double-acting piston.

MATERIAL

NBR .Hardness: 90° Sh A.

OPERATING CONDITIONS

Speed: < 0.5 m/sec.

Pressure: <10 bars.(pneumatic)

<63 bars. (hydraulic)

Temperature:- 30 to + 100°C


Medium: Air, oil, water, mineral oil

Pressure Fluids

SURFACE ROUGHNESS

Dynamic surface Ra max< 0.4 µm

PNEUMATIC PISTON SEAL

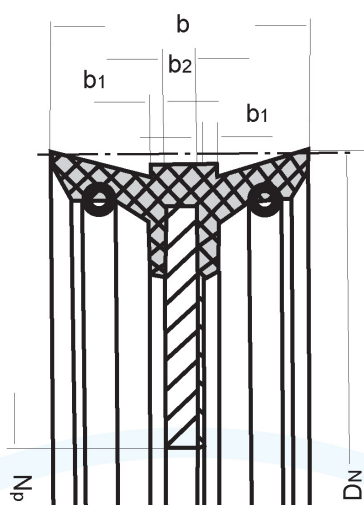

MAIN FEATURES

TE-TE complete pistons are used as pistons in pneumatic and double-acting hydraulic cylinders at low pressure.

	Reference		Dn	dN	b	b2	b1+b1
TE-TE	26.00	8.20	26.00	8.20	22.00	3.00	3.00
TE-TE	30.00	8.20	30.00	8.20	22.00	3.00	3.00
TE-TE	35.00	8.20	35.00	8.20	26.00	3.00	3.00
TE-TE	40.00	10.20	40.00	10.20	22.00	3.00	3.00
TE-TE	45.00	10.20	45.00	10.20	25.00	4.00	3.00
TE-TE	50.00	10.20	50.00	10.20	25.00	4.00	3.00
TE-TE	55.00	10.20	55.00	10.20	25.00	4.00	3.00
TE-TE	60.00	12.20	60.00	12.20	26.00	4.00	3.00
TE-TE	63.00	12.20	63.00	12.20	25.00	4.00	3.00
TE-TE	70.00	12.20	70.00	12.20	30.00	5.00	3.00
TE-TE	80.00	12.20	80.00	12.20	30.00	5.00	5.00
TE-TE	90.00	38.00	90.00	38.00	24.00	6.00	4.00
TE-TE	100.00	12.20	100.00	12.20	35.00	6.00	4.00

	Reference	Dn	dN	b	b2	b1+b1	
TE-TE	110.00	26.20	110.00	26.20	40.00	6.00	4.00
TE-TE	110.00	12.20	110.00	12.20	40.00	6.00	4.00
TE-TE	115.00	20.20	115.00	20.20	30.00	8.00	5.00
TE-TE	125.00	20.20	125.00	20.20	40.00	8.00	6.00
TE-TE	140.00	20.20	140.00	20.20	40.00	9.00	6.00
TE-TE	150.00	20.20	150.00	20.20	40.00	10.00	6.00
TE-TE	160.00	20.20	160.00	20.20	40.00	10.00	6.00
TE-TE	160.00	28.00	160.00	28.00	40.00	10.00	6.00
TE-TE	180.00	20.20	180.00	20.20	40.00	10.00	6.00
TE-TE	200.00	20.20	200.00	20.20	40.00	10.00	6.00
TE-TE	250.00	30.20	250.00	30.20	40.00	12.00	4.50
TE-TE	300.00	35.20	300.00	35.20	40.00	12.00	4.50
TE-TE	300.00	60.00	300.00	60.00	40.00	12.00	5.00